

E Series NV Uninterruptible Power Systems

Reliable Power Protection for Today's Computing Environments



The E Series® NV line interactive uninterruptible power system (UPS) provides affordable power protection for your personal computer and peripherals. While packed with valuable features such as modem protection and plentiful power receptacles, the compact size is ideal for limited office and home working spaces.

Product Snapshot

Power Rating : 400, 600, 800, 1000, 1400, 2000 VA
tower models

Voltage : 162 to 290Vac (high voltage)

Frequency : 50/60 Hz (auto-sensing)

Technology : Voltage Regulation



Features

- Automatic Voltage Regulation (AVR) stabilizes fluctuating power sources
- Microprocessor control design ensures high reliability
- Up to six receptacles, allowing easy equipment connection
- User replaceable batteries allow easy maintenance
- Start-on-battery provides portable power capability
- WINPOWER software monitors power conditions and gracefully shuts down computer applications prior to battery depletion
- Data surge protection protects phone, modem and internet connections
- Intuitive LED indicators display UPS status




Powering Business Worldwide

E SERIES NV UPS TECHNICAL SPECIFICATIONS - FOR HIGH AND LOW VOLTAGE MODELS

Model/Watts	E Series NV 400/240	E Series NV 600/360	E Series NV 800/480	E Series NV 1000/600	E Series NV 1400/840	E Series NV 2000/1200
Model Numbers (High Voltage)	ENV400H	ENV600H	ENV800H	ENV1000H	ENV1400H	ENV2000H
Technology	Line Interactive with Automatic Voltage Regulation					
Input / Output						
Input Voltage Window (HV)	170-280			160-280	166-280	
Output Voltage on Battery	230V (High Voltage Models)					
Frequency	50/60Hz, auto-detection					
Data Line Protection	Input / Output jacks included for Telephone / Modem / Internet Line surge protection					
Output receptacles (High Volt)	4 ea, IEC style (1 output cable included)			6 ea, IEC style (1 output cable included)		
Input Connection (High Volt Models)	Detachable 1.8M IEC input cable (cable included)					
Battery						
Load						
100W	10	18	22	35	45	45
120W	7	14	17	-	-	-
200W	-	-	8	14	25	25
400W	-	-	-	6	10	10
600W	-	-	-	-	4	5
Start-On-Battery	Unit can be started without being connected to AC utility power -- allows for portable power source					
User Interface						
Visual	1 ON / OFF button, 1 indicator LED			1 ON / OFF button, six indicator LED's, including load level		
Audible	Five audible alarms indicate operating modes					
Communications / management						
Power Management Software	WINPOWER power management software, downloadable via internet					
Connection Type	USB port, with included USB cable					
Approvals						
	CE marking (High Voltage Models)					
Dimensions and weights						
Dimensions (high voltage models)	140 x 100 x 330 mm			205 x 145 x 385 mm		
Weight (high voltage models)	5 kg	6 kg	6.5 kg	9.6 kg	10.5 kg	10.6 kg

NV REAR PANEL

1. Output Receptacles 2. AC Input 3. Modem Surge Protection 4. USB Communication Port 5. Circuit Breaker 6. Cooling Fan

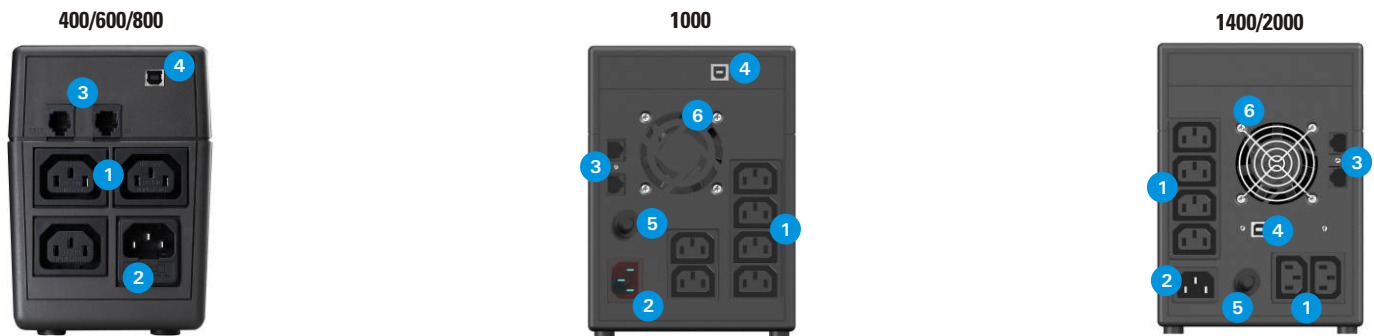

*Battery backup time is approx figure. Battery backup is proportional to number of power cycles and few other factors. Hence the battery time can vary to large extent based on the conditions.

For more product information please contact



Offices Across India

**Eaton's Electrical Group
Powerware Division**
8609 Six Forks Road Raleigh
NC 27615 U.S.A

South Asia Office

Eaton Power Quality Pvt. Ltd.
Unit No. 1, Second Floor, TDI Center, Jasola
New Delhi-110 044, India
Tel: +91-11-4223 2300
Sales Hotline : +91-11-4223 2329
Service Hotline : +91-11-4223 2323

E-mail : EatonPowerQualityIndia@eaton.com

Website: www.eaton.com • www.powerware.com

Offices Across India

Mumbai
106, Centre Point, Andheri-Kurla Road
J.B. Nagar, Andheri East
Mumbai-400059
Tel : +91-22-4005 3811
Fax: +91-22-2821 6438

Chennai
No. 22, Chamier's
Road Block "D" Ashika Chambers
Teynampet
Chennai-600 018
Tel : +91-44-2432 0249-50
Fax: +91-44-2432 0249

Bangalore
8th Floor, Unity Building
JC Road, Bangalore-560 002
Tel : +91-80-6453 7277
Fax : +91-80-2227 1694

Secunderabad
B1, Plot No. 3/16 & 3/17, Ramdass Garden
West Maredpally, Secunderabad-500 026
Tel : +91-40-2770 0799

Ahmedabad: +91 987 902 6916
Bhopal: +91 989 328 1824
Chandigarh: +91 931 357 6328
Coimbatore: +91 934 483 4581
Cochin: +91 934 982 1582
Kolkata: +91 33 3293 1395
Pune: +91 20 3061 1886

Sales and Service Operations

Sri Lanka:
+94112871000
+94112332194/5

Nepal:
+97714429777
+97714429888
+97714423376

Bangladesh:
+88029347918
+88029330765
+88029348229